

FORM PTO-1390 (REV. 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 10191/1870	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				09/914977	
INTERNATIONAL APPLICATION NO. PCT/DE00/00137		INTERNATIONAL FILING DATE 15 January 2000 (15.01.00)		PRIORITY DATE CLAIMED: 05 March 1999 (05.03.99)	
TITLE OF APPLICATION METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE SEQUENCE					
APPLICANT(S) FOR DO/EO/US Andreas ENGELSBURG					
Applicant(s) herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (unsigned) 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11. to 16. below concern other document(s) or information included:					
<ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification and marked-up version of the substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: International Search Report, International Preliminary Examination Report and PCT/RO/101.(English Translations) 					

EXPRESS MAIL NO.: EL244504872US

U.S. APPLICATION NO. 09/914977
 37 C.F.R. 1.5

 INTERNATIONAL APPLICATION NO.
 PCT/DE00/00137

 ATTORNEY'S DOCKET NUMBER
 10191/1870

 17. ☒ The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

 Search Report has been prepared by the EUROPEAN PATENT OFFICE or
 JPO \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00

 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but
 international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00

 Neither international preliminary examination fee (37 CFR 1.482) nor international search
 fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,000.00

 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims
 satisfied provisions of PCT Article 33(2)-(4) \$100.00

CALCULATIONS | PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 860

 Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
 from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate		
Total Claims	22 - 20 =	2	X \$18.00	\$ 36.00	
Independent Claims	3 - 3 =	0	X \$80.00	\$ 0	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	

TOTAL OF ABOVE CALCULATIONS =

\$ 896.00

 Reduction by ½ for filing by small entity, if applicable. Verified Small Entity statement must
 also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$ 896.00

 Processing fee of \$130.00 for furnishing the English translation later the ☐ 20 ☐ 30
 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$ 896.00

 Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
 accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

\$

TOTAL FEES ENCLOSED =

\$896.00

 Amount to be
 refunded

\$

charged

\$

- a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$896.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0600. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

 Kenyon & Kenyon
 One Broadway
 New York, New York 10004
 (212) 425-7200 (Telephone)
 (212) 425-5288 (Facsimile)

CUSTOMER NO. 26646

SIGNATURE

Richard L. Mayer, Reg. No. 22,490

NAME

DATE

9/5/2001

 Richard Mayer
 53/865
 Aaron C.
 05/01/2001

[10191/1870]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Andreas ENGELSBERG
Serial No. : To Be Assigned
Filed : Herewith
For : METHOD AND DEVICE FOR DETERMINING AN IMAGE
SHIFT IN AN IMAGE SEQUENCE
Art Unit : To Be Assigned
Examiner : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend without prejudice the above-identified application before examination, as set forth below.

IN THE TITLE:

Please amend without prejudice the title to be:

--METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE
SEQUENCE--.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

IN THE CLAIMS:

Without prejudice, please cancel original claims 1 to 12, and please add new claims 13 to 34 as follows:

EL244504872US

--13. (New) A method for determining an image shift in an image sequence to compensate for an image source movement, a plurality of image zones of images being available to determine the image shift, each of the plurality of image zones being at a specific position in the images and each having predefined dimensions of predefined numbers of pixels in different image directions, the method comprising:

determining the image shift from one of (i) first image data of the first image and second image data of a second image, and (ii) the first image data of the first image and input image data of an input image for use in correcting the first image in the image sequence;

determining a zone shift of any given image zone of the plurality of image zones from one of (i) the first image data of the first image and the second image data of the second image within the given image zone, and (ii) the first image data of the first image and the input image data of the input image within the given image zone, including determining the zone shift in two image zones and determining a reliability for the zone shift determination by:

forming the zone shift and a correlation quotient for each of the two image zones;

determining a threshold value function as a function of a corresponding value of determined zone shifts in the two image zones;

comparing the correlation quotient of one of the two image zones to a comparison value obtained from the threshold value function for a zone shift of another of the two image zones;

determining that the reliability of the zone shift determination is adequate for the one image zone of the two image zones if the correlation quotient determined for the one image zone is greater than the comparison value; and

using the zone shift of one image zone of the plurality of image zones as the image shift as a function of the reliability for the zone shift determination of the one image zone.

14. (New) The method of claim 13, wherein the correlation quotient for one of the plurality of image zones is determined by:

determining shift correlation values for multiple possible zone shifts using block-matching;

determining the zone shift of the plurality of image zones to be a zone shift associated with a maximum of the shift correlation values; and

forming the correlation quotient by dividing the maximum of the shift correlation values by an average of the shift correlation values.

15. (New) The method of claim 13, wherein:

the threshold value function assumes a predefined second threshold value for a given zone shift value less than a predefined first threshold value;

the threshold value function assumes a value that is the predefined second threshold value minus a product for the given zone shift value greater than the predefined first threshold value;

the product includes as factors a predefined gradient parameter and a difference; and

the difference is formed from the given zone shift and the predefined first threshold value.

16. (New) A method for determining an image shift in an image sequence of a plurality of images to compensate for a camera movement, at least one image zone of the plurality of images being available to determine the image shift, the at least one image zone being at a predefined position in the images and having predefined dimensions of predefined numbers of pixels in different image directions, the method comprising:

determining the image shift from one of (i) first image data of a first image and second image data of a second image, and (ii) the first image data of the first image and input image data of an input image by using a zone shift of the at least one image zone as the image shift; and

determining the zone shift using block shift information from block-based coding used for the at least one image zone, wherein:

image blocks located in at least one image zone are reflected in the block shift information of the at least one image zone, and

the at least one image zone is used to determine the image shift as a function of a reliability of a zone shift determination.

17. (New) The method of claim 16, wherein the zone shift for the at least one image zone, the zone shift including a horizontal component and a vertical component, and the reliability of a zone shift determination are determined by:

establishing a first frequency distribution of frequencies of different values for a horizontal component of the block shift information to determine the horizontal component of the zone shift,

the horizontal component of the zone shift corresponding to a horizontal component value of the block shift information for which the first frequency distribution assumes its primary maximum;

establishing a second frequency distribution of frequencies of different values for a vertical component of the block shift information to determine the vertical component of the zone shift, the vertical component of the zone shift corresponding to a vertical component value of the of the block shift information for which the second frequency distribution assumes its primary maximum;

determining that the reliability of the zone shift is adequate when the following conditions are met:

an absolute value of a difference in position of values corresponding to the primary maximum and a secondary maximum of the first frequency distribution of the horizontal component of the block shift information is less than a predefined first difference threshold;

the absolute value of the difference in position of the values corresponding to the primary maximum and a secondary maximum of the second frequency distribution of the vertical component of the block shift information is less than a predefined second difference threshold;

the primary maximum of the first frequency distribution is greater than a first frequency threshold; and

the primary maximum of the second frequency distribution is greater than a second frequency threshold.

18. (New) The method of claim 13, further comprising:

separating an image movement produced by the image source movement from an additional movement superimposed on the image movement in at least one of the image zones of the image to be corrected by:

determining that a probability that the image movement will occur without the additional movement at different image positions; and

determining the position and dimensions of a given image zone, and permanently specifying as a function of the probability that the image movement will occur without the additional movement within the given image zone.

19. (New) The method of claim 13, further comprising:

selecting a position and dimensions of at least one first image zone so that the at least one first image zone of the images to be corrected is largely filled by an image background.

20. (New) The method of claim 13, further comprising:

selecting position and dimensions of at least one second image zone so that the at least one second image zone of the images to be corrected is largely filled with an image foreground.

21. (New) The method of claim 19, wherein the at least one first image zone and at least one second image zone are available to determine the image shift.

22. (New) The method of claim 19, wherein two first image zones and a single second image zone are available for correcting the image, and the image shift is determined, in descending order of priority, from one of:

an average of zone shifts of the first two image zones if the reliability of the zone shift determination of the first two image zones is determined to be adequate;

the zone shift of one of the two first image zones for which the reliability of the zone shift determination is determined to be adequate; and

a zone shift of the single second image zone.

23. (New) The method of claim 22, wherein the source image movement is a camera movement and the method is used for a head-and-shoulder shot, further comprising:

selecting the first two image zones in a side area to the left and right of a vertical center axis of a predefined rectangular image; and

selecting the single second image zone in a center of the image with respect to the vertical center axis of the rectangular image;

wherein:

a first bottom distance of the first two image zones from a bottom of the image is greater than a first top distance of the first two image zones from a top of the image; and

a second top distance of the single second image zone from the top of the image is greater than the second bottom distance of the single second image zone from the bottom of the image.

24. A device for determining an image shift, comprising:

an image shift detecting arrangement, including a zone shift detector, an image storage device, and a microcomputer, wherein the shift detecting arrangement determines the image shift; and

an enlarging arrangement;

wherein the device is operable to determine the image shift in an image sequence to compensate for an image source movement, a plurality of image zones of images being available to determine the image shift, each of the plurality of image zones being at a specific position in the images and each having predefined dimensions of predefined numbers of pixels in different image directions, by:

determining the image shift from one of (i) first image data of the first image and second image data of a second image, and (ii) the first image data of the first image and input image data of an input image for use in correcting the first image in the image sequence;

determining a zone shift of any given image zone of the plurality of image zones from one of (i) the first image data of the first image and the second image data of the second image within the given image zone, and (ii) the first image data of the first image and the input image data of the input image within the given image zone, including determining the zone shift in two image zones and determining a reliability for the zone shift determination by:

forming the zone shift and a correlation quotient for each of the two image zones;

determining a threshold value function as a function of a corresponding value of determined zone shifts in the two image zones;

comparing the correlation quotient of one of the two image zones to a comparison value obtained from the threshold value function for a zone shift of another of the two image zones; and

determining that the reliability of the zone shift determination is adequate for the one image zone of the two image zones if the correlation quotient determined for the one image zone is greater than the comparison value; and

using the zone shift of one image zone of the plurality of image zones as the image shift as a function of the reliability for the zone shift determination of the one image zone.

25. (New) The method of claim 13, wherein the image source is a camera.

26. (New) The method of claim 13, wherein one of the following is satisfied:

the second image data of the second image directly precedes the first image in the image sequence; and

the input image data of the input image directly precedes the first image in the image sequence.

27. (New) The method of claim 16, wherein one of the following is satisfied:

the second image data of the second image directly precedes the first image in the image sequence; and

the input image data of the input image directly precedes the first image in the image sequence.

28. (New) The method of claim 16, wherein the block shift information includes image shift vectors.

29. (New) The method of claim 18, wherein the image source is a camera.

30. (New) The method of claim 18, wherein at least one first image zone is used to determine the image shift.

31. (New) The method of claim 13, further comprising:

selecting a position and dimensions of at least one first image zone so that the at least one first image zone of the images to be corrected is largely filled by an image background; and

selecting position and dimensions of at least one second image zone so that the at least one second image zone of the images to be corrected is largely filled with an image foreground.

32. (New) The method of claim 31, wherein the at least one first image zone and the at least one second image zone are available to determine the image shift.

33. (New) The method of claim 20, wherein at least one first image zone and the at least one second image zone are available to determine the image shift.

34. (New) The method of claim 23, wherein:

the first two image zones is selected in a side area symmetric to the vertical center axis of the predefined rectangular image; and

the single second image zone is selected in a center of the image symmetric to the vertical center axis of the rectangular image.--.

Remarks

This Preliminary Amendment cancels without prejudice original claims 1 to 12 in the underlying PCT Application No. PCT/DE00/00137, and adds without prejudice new claims 13 to 34. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(iii) and § 1.125(b)(2), a Marked Up Version Of The Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. In the Marked Up Version, shading indicates added text and bracketing indicates deleted text. Approval and entry of the Substitute Specification (including Abstract) is respectfully requested.

The underlying PCT Application No. PCT/DE00/00137 includes an International Search Report, dated June 23, 2000. The Search Report includes a list of documents that were uncovered in the underlying PCT Application. A copy of the Search Report accompanies this Preliminary Amendment.

The underlying PCT Application No. PCT/DE00/00137 also includes an International Preliminary Examination Report, dated February 8, 2001. An English translation of the International Preliminary Examination Report accompanies this Preliminary Amendment.

Applicant asserts that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Dated: 9/5/2001

Respectfully Submitted,
KENYON & KENYON

By: Richard L. Mayer

Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200 (telephone)
(212) 425-5288 (facsimile)

CUSTOMER NO. 26646

(By 90
Reg. No.
33,865
Harold C.
DEBITH)

406235

[10191/1870]

METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE
SEQUENCEFIELD OF THE INVENTION

The present invention relates to a method and device for determining an image shift in an image sequence.

5 BACKGROUND INFORMATION

A picture stabilization system whose function is to maximize the stability of a picture when shooting with a handheld camera is discussed in the reference "Bildstabilisation in Consumer-Camcordern, Funktion und Wirkungsweise" (Picture Stabilization in Consumer Camcorders: Function and Effects), H. Rindtorff, Fernseh- und Kinotechnik, vol. 49, no. 1/2, 1995. As characterized, the image is divided into four image zones in which motion vectors that describe the image shift are determined. The motion vectors in the individual image zones purportedly yield an overall motion vector which ideally represents the camera travel.

The entire motion vector is integrated into an attenuation factor, which means that past vector values are taken into account, and the magnitude of correction is reduced when the horizontal and vertical shifts exceed a limit value.

SUMMARY OF THE INVENTION

An exemplary method and/or exemplary embodiment of the present invention is directed to a method and/or device which provides that the reliability of image shift is not determined separately for the two image zones, but rather the determined shift in one of the two image zones determines the value assumed by the threshold value function and to which the shift of the second of the first two image zones are compared.

SUBSTITUTE SPECIFICATION

Another exemplary method of the present invention is directed to providing that the shift determination of one image zone and the determination of shift determination reliability thus do not take place independently of movements, for example, zone shifts, in other portions of an image.

Another exemplary embodiment and/or exemplary method of the present invention is directed to determining the correlation quotient, in each case, for one of the plurality of image zones according to an exemplary method having the following steps:

- shift correlation values are determined for multiple possible image shifts, using a block-matching method;
- the image shift for which maximum shift correlation values are achieved is regarded as a shift in the image zone;
- the correlation quotient is generated from the maximum of shift correlation values, divided by the average of the determined shift correlation values.

This exemplary embodiment and/or exemplary method of the present invention may be directed to determining the image shift through the entire image zone, since the shift correlation values are derived from a summation across all pixels or a selection of pixels within the image zone in question. Further, the correlation quotient may be normalized, since the maximum of the shift correlation values, from which the image shift is obtained, may be divided by the average of the calculated shift correlation values.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that for any given value of a zone shift that is less than a specified first threshold value, the threshold value function may assume the value of a predefined second threshold value; and for any given value of a zone shift that is greater than the predefined first threshold value, the threshold value function

SUBSTITUTE SPECIFICATION

may assume the value of the predefined second threshold value minus a product, the product including a predefined gradient parameter and a difference as factors, and the difference being formed from the given zone shift and the predefined first threshold value. Thus, an adequate reliability may be allowed for determining the zone shift in the case of larger determined shifts in an image zone, even if the correlation quotient is smaller, which may indicate a poorer correlation in the case of a smaller determined image shift. Due to the dependency of the first two image zones in determining reliability for the zone shift determination, the construction of the threshold value function means that the requirements imposed on the reliability of zone shift determination, i.e., the requirements imposed on the level of the correlation quotient may decrease in the use of a relatively large zone shift in one of the first two image zones.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that the method is performed especially easily and economically, for example, the hardware support may allow obtainment of block shift information, for example, block shift vectors of small image blocks, at little or no additional cost, for example, from a block-based transmission method for reducing bandwidth.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that for each of the image zones, an exemplary method having the following steps may be performed to determine a zone shift that includes a horizontal and a vertical component and to determine the reliability of the zone shift determination:

- a first frequency distribution of the frequencies of different values of the horizontal component of the block shift information may be established to determine the horizontal component of the zone shift, with the horizontal component of the zone shift corresponding to the value of

SUBSTITUTE SPECIFICATION

the horizontal component of the block shift information for which the first frequency distribution may assume its primary maximum;

- a second frequency distribution of the frequencies of different values of the vertical component of the block shift information may be established to determine the vertical component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution may assume its primary maximum; and
- the reliability of the zone shift determination may be deemed to be adequate when all of the following conditions have been met:
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the first frequency distribution, of the horizontal component of the block shift information is less than a predefined first difference threshold;
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the second frequency distribution, of the vertical component of the block shift information is less than a predefined second difference threshold;
 - the primary maximum of the first frequency distribution is greater than a first frequency threshold; and
 - the primary maximum of the second frequency distribution is greater than a second frequency distribution.

Using a relatively "simple" apparatus, arrangement, structure, or methods, such as, for example, monitoring the frequencies of the occurring horizontal and vertical components of the

SUBSTITUTE SPECIFICATION

existing block shift information, the zone shift of an image zone may be determined and the reliability of the zone shift determination may be determined.

5 Another exemplary embodiment and/or exemplary method of the present invention is directed to separating an image movement, for example, produced by camera movement, from an additional movement that is superimposed on the image movement in some image zones of the image to be corrected, using the following steps:

- the probability of an image movement occurring without the additional movement is determined at different positions in an image;
- the position and dimensions are determined and permanently set for a given image zone as a function of the probability that the image movement will occur within this one image zone without the additional movement; and
- at least one first image zone is given priority for use in determining the shift.

20 In this way, image zones may be used for determining image shifts, for example, in those portions of an image that may be identified by a maximum probability that image movement will occur without the additional movement. The determination of image shifts in an image sequence may be performed with particular reliability. Another exemplary embodiment and/or exemplary method of the present invention is directed to permanently specifying the position and dimensions of the image zones for reliable determination of the image shifts in an image sequence. Thus, the shift may be reliably determined with relatively little processing effort, for example, for a special video communications scenario. A first image zone, which may be used to determine the shift, may therefore be employed by selecting its position and dimensions within the images, for example, solely to determine the shift, so that other image zones do not need to be taken into account in this

SUBSTITUTE SPECIFICATION

case, which may reduce the processing effort for determining the image shift.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that the position and dimensions of the at least one first image zone can be selected so that the at least one first image zone of the images to be corrected are largely filled by the image background. The image background may rarely contain any additional movement that is superimposed on the image movement produced, for example, by the unintentional movement of a camera, from one image to another between which the shift is to be determined, which can mean that a first image zone of the images to be corrected may be used to determine the shift, provided that it is filled with the image background.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that the position and dimensions of at least one second image zone may be selected so that the at least one second image zone of the images to be corrected is largely filled by the image foreground. Thus, a shift in the images of an image sequence may be determined, especially easily and accurately if, for example, the image background is subjected to strong additional movement that is superimposed on the image movement produced, for example, by the unintentional camera movement.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that both the at least one first image zone and the at least one second image zone are available for determining the shift. Thus, the zone shift determination may be checked because the exemplary method provides a measure for the reliability of the zone shift determination. A reliability determination for the reliability of the zone shift may serve primarily to easily and reliably separate the image movement from the additional

SUBSTITUTE SPECIFICATION

movement superimposed upon it.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that two first
5 image zones and a single second image zone are available for image correction, with the shift being determined in at least one of the following:

- from the average of the zone shifts of the two first image zones, when the reliability of the zone shift determination
10 of the first two image sequences is deemed to be adequate;
- from the zone shift of the one of the first two image zones in which the reliability of the zone shift determination is deemed to be adequate; and
- from the zone shift of the second image zone.

Different image zones having different priorities for determining the image shifts in an image sequence may be used. For example, priority may be given to the use of image zones that are largely filled by the image background for
20 determining the image shifts, with the use of the average of the zone shifts in the first two image zones yielding a reliable shift determination. The second priority for determining the shift, using the zone shift from the first two image zones, may be selected, for example, to minimize the
25 influence of moving objects in the background, since a moving object in one of the two first image zones may mean that the zone shift in the other of the two image zones is used to determine the image shifts in an image sequence. On the third level of priority, the image may shift from the zone shift of
30 the second image zone, for example, an image zone that is largely filled by the image background, may be used.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing for a head-and-
35 shoulder shot, with the first two image zones being selected in a side image zone on the left and right, for example,

SUBSTITUTE SPECIFICATION

symmetrically to the vertical center axis of a predefined rectangular image, with the distance of the first two image zones from the bottom of the image being greater than the distance of the first two image zones from the top of the image; the second image zone in the center of the image being selected, for example, symmetrically to the vertical center axis of the rectangular image; the distance of the second image zone from the top edge, for example, being greater than the distance of the second image zone from the bottom edge. The image zones may be selected so that, for example, in a head-and-shoulder shot, to rationally use information from the image zones for determining the zone shifts and for determining image shifts in an image sequence, based on a system of priorities.

Another exemplary embodiment and/or exemplary method of the present invention is directed to determining image shifts in an image sequence and includes a shift detecting circuit (100) and an enlarging circuit (200), with the shift detecting circuit (100) including a zone shift detector (110), an image storage device (120) and a microcomputer (130); and the shift detecting circuit (100) determining the shift (15). Thus, the shift may result in faster and more economical performance of an exemplary method of to the present invention, for example, by implementing the steps of the exemplary method of the present invention, for example, in an integrated circuit or on a personal computer (pc) board.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a block diagram of an exemplary embodiment of the present invention.

Figure 2 shows the picture stabilization system by determining an image shift in an image sequence.

Figure 3 shows a flowchart of the picture stabilization

SUBSTITUTE SPECIFICATION

system.

Figure 4 shows selecting image zones within an image for performing an exemplary method of the present invention.

5

DETAILED DESCRIPTION

Figure 1 shows a block diagram of an exemplary device of the present invention for implementing the exemplary method of determining an image shift in an image sequence. The exemplary device of the present invention may include an input 10, an output 20, a shift detecting circuit 100, and an enlarging circuit 200. Shift detecting circuit 100 may include zone shift detector 110, an image storage device 120, and a microcomputer 130. Shift detecting circuit 100 may also include an input (not illustrated) that may be connected to input 10 of the exemplary device of the present invention as well as to zone shift detector 110 and image storage device 120. Shift detecting circuit 100 may also include an output (not illustrated) that may be connected to microcomputer 130, with zone shift detector 110 also being connected to microcomputer 130. Enlarging circuit 200 may include two inputs (not illustrated) and one output that may be connected to output 20 of the device. The two inputs of enlarging circuit 200 may each be connected to an enlarging processor 210, with one of the two inputs of enlarging circuit 200 being connected to input 10 of the device; and the other of the two inputs of enlarging circuit 200 being connected to the output of shift detecting circuit 100.

Figure 2 shows an example of the picture stabilization system, for example, to compensate for camera movements. A first input image 13 may be corrected to form a first output image 23, using image information of a second, for example, earlier, input image 11.

35

Second input image 11 includes an image segment that is

SUBSTITUTE SPECIFICATION

enlarged by increasing its size to form second output image 21. Second input image 11 is completely picked up by the camera, although a user of an exemplary device of the present invention may see, for example, only the enlarged segment in the form of second output image 21. The segment may be referred to as second image 12 or as corrected second image 12.

According to a first exemplary method of the present invention, corrected second image 12 may be used to correct first input image 13. First input image 13 may also include an image segment that is referred to here as uncorrected first image 14. Comparing uncorrected first image 14 to second image 12, i.e., corrected first image 12, allows for a determination of a shift 15 so that uncorrected first image 14 may be converted to a corrected first image 16 as a result of shift 15. The comparison of uncorrected first image 14 to second image 12, for example, may not involve using all the image data, but rather only the image data from the image zones (not illustrated) of first image 14 and second image 12.

According to a second exemplary method according to the present invention, second input image 11 may be used to correct first input image 13. Comparing first input image 13 to second input image 11 may allow a determination of a shift 15 so that uncorrected first image 14 may be converted to corrected first image 16 as a result of shift 15. The comparison of uncorrected first input image 13 to second input image 11, for example, may not involve using all the image data, but rather only the image data from the image zones (not illustrated) of first input image 13 and second input image 11.

According to both exemplary methods, corrected first image 16 may now be displayed for the user in the form of first output image 23. Compared to the second output image, the shift of

SUBSTITUTE SPECIFICATION

first input image 13, i.e., corrected first image 16,
respectively, may no longer be seen in first output image 23.

Figure 3 shows steps of an exemplary method of the present
invention, using the correction of first input image 13 as an
example. The zone shifts of image zones may be determined in a
first step 30. First input image 13 may be compared to
corrected, for example, directly preceding second image 12 or
to second, for example, directly preceding input for starting
image 11. The shift of first image 14 may be subsequently
determined in a step 40 in an exemplary method of the present
invention. Uncorrected first image 14 may be shifted by shift
vector 15 in a third step 50. This operation may yield
corrected first image 16. Corrected first image 16 may then be
enlarged in a fourth step 60, resulting in first output image
23.

To correct a further input image using an exemplary method
according to the present invention, the result of third step
50 may be supplied to first step 30 by storing the image, for
example, in image storage device 120. Third step 50 may yield
corrected first image 16, which thus may replace corrected
second image 12 and may be used in conjunction with the
correction of the further input image to determine zone shifts
in first step 30.

Alternatively, first input image 13, i.e., uncorrected first
image 14, may be stored in image storage device 120 together
with determined shift 15 for correcting a further input image.

Figure 4 shows an example of a distribution of image segments
6, 7, 8 within first input image 14. Two first image zones 6,
7 may be selected, for example, for applying an exemplary
method of the present invention to a head-and-shoulder shot,
symmetrically to the vertical center axis of the given
rectangular first image 14. The distance of first two image

SUBSTITUTE SPECIFICATION

zones 6,7 from the bottom of the image may be greater than the distance of first two image zones 6, 7 from the top of the image.

5 A second image zone 8 may be selected in the center of first image 14, for example, symmetrically to the vertical center axis of the rectangular image, with the distance of second image zone 8 from the top of the image preferably being greater than the distance of the second image zone from the bottom of the image.

10 An exemplary method of the present invention may be directed to determining a shift 15 of images in an image sequence and may be used for picture stabilization to compensate for camera movements with regard to digital video stabilization in mobile video communications equipment. This may reduce and/or eliminate movements caused by the mobile use of video communications equipment.

15 The exemplary method may involve deriving the camera movement from the relative shift in consecutive images and extracting from one input image, e.g., first input image 13, the segment, for example, corrected first image 16, that compensates for the camera movement on the basis of determined shift 15, for example, of corrected first image 16 relative to uncorrected first image 14.

20 With the exemplary method of the present invention, for example, a plurality of image zones 6, 7, 8 may be provided for determining shift 15. The image zones may be clearly determined by their positions and dimensions within the image. By selecting the position and dimensions of image zones 6, 7, 8, it may be easy to separate an image movement that is produced by a camera movement from an additional movement that is superimposed on the image movement in segments of the image to be corrected.

SUBSTITUTE SPECIFICATION

For this purpose, the probability that the image movement will occur without the additional movement may be determined in different positions of the images in an image sequence, yielding preferred components within the image that can be used to separate the image movement from the additional movement. For example, selecting image zones 6, 7, 8 illustrated in Figure 4 may be useful for the special shooting situation of a speaker which is centered in the image. The special characteristics of this shooting situation may be utilized as a-priori factors in selecting and defining image zones 6, 7, 8.

According to this shooting situation, for example, the first two image zones 6, 7 are assumed to be largely located in the image background, while second image zone 8 is assumed to be largely in the foreground. This means that first two image zones 6, 7 may be primarily filled with image data from the image background, while second image zone 8 may be primarily filled with image data from the image foreground. This can allow a prioritization of first two image zones 6, 7, thereby determining a shift 15 of images in an image sequence, for example, by determining the zone shift in first two image zones 6, 7. Second image zone 8 may be used to determine image shift 15 only if the use of zone shifts from first two image zones 6, 7 allows for only a zone shift that is subject to high unreliability, i.e., to an insufficiently strong reliability.

In the example given, this prioritization means that picture stabilization may be performed with image background information. However, the exemplary methods in this case do not apply exclusively to distinguishing and setting different priorities to determine a shift in images in an image sequence from background and foreground information, but also, for example, to using criteria such as edge determination, absence of edge determination and the like.

SUBSTITUTE SPECIFICATION

The first two image zones 6,7 in the example given may have a length of 120 pixels in the vertical direction and 40 pixels in the horizontal direction in Qcif format. In this format, second image zone 8 may measure 135 pixels in the vertical direction and 85 pixels in the horizontal direction.

Another exemplary method of the present invention is directed to determining a shift 15 in images in an image sequence which also serves to minimize the influence of moving objects, for example, in the image background, by using a decision criterion to detect moving objects in image zones. The moving objects, for example, in one of image zones 6, 7, 8 may produce an additional movement that is superimposed on the shift produced by the camera movement.

To determine the zone shift for an image zone 6, 7, 8, two alternative methods may be used according to the present invention, depending on whether block shift information from a block-based coding method, for example, a block-based transmission method for reducing bandwidth, is accessible using a relatively "simple" apparatus, arrangement, structure or method. If the block shift information is not easily accessible, a block-matching method may be used to determine the zone shift, making it possible to detect an additional movement, i.e., a local movement, within one of two first image zones 6, 7. A local movement occurring in an image zone 6, 7, 8, e.g., an emerging object, may be detected by evaluating the shift correlation values from the block matching method. To do this, the ratio between the average of the shift correction values and the maximum of the correlation values may be compared with an adaptive threshold value function.

To determine the average of the shift correlation values, the sum of all determined correlation values may be formed and subsequently divided by the number of these values. The

SUBSTITUTE SPECIFICATION

maximum of the shift correlation values may be assumed for a determined zone shift. The zone shift corresponding to the maximum of the shift correlation values may be assumed as the zone shift of the image zone. The correlation quotient may correspond to the maximum of shift correlation values, divided by the average of the shift correlation values, and may thus be normalized. An additional movement, i.e., a local movement within the image zone, may be detected if the correlation quotient is less than the value of an adaptive threshold value function. The adaptive threshold value function may be dependent on the length of a shift vector that indicates a zone shift.

According to the exemplary embodiment and/or exemplary method of the present invention, the correlation quotient for first image zone 6, 7 may be compared to the value of the adaptive threshold value function to detect an additional movement, i.e., a local movement, in one of first two image zones 6, 7, the vector length of shift 15 of the other of first two image zones 6, 7 yielding the value for the adaptive threshold value function. The threshold value function may be defined as follows:

- for any given vector length of the zone shift vector, i.e., for any given zone shift that is smaller than a predefined first threshold value, the threshold value function may assume a predefined second threshold value;
- for any given vector length of the zone shift vector, i.e., for any given zone shift that is greater than the predefined first threshold value, the threshold value function may assume the value of the predefined second threshold value minus a product, with the product including a predefined gradient parameter and a difference as factors, and with the difference being derived from the given zone shift and the predefined first threshold value.

Another exemplary method for determining image shifts in an

SUBSTITUTE SPECIFICATION

image sequence may be based, for example, on the use of block shift information from a block-based coding method. The shift vectors of small blocks, e.g., having a size of 8 x 8 or 16 x 16, may be used to determine the zone shift in image zones 6, 7, 8. The information from the block-based coding method may thus be used to reduce computing effort. This approach may be attractive if the block shift vectors need to be obtained with little or no additional effort, for example, using hardware support. Detecting local movement in an image zone 6, 7, 8, for example, in one of first two image zones 6, 7, may be accomplished with relative ease if shift vectors of small blocks in the image are available.

Initially, all shift vectors for blocks located in one of image zones 6, 7, 8 may be assigned to corresponding image zone 6, 7, 8. Separate frequency distributions, i.e., histograms, may be created from the assigned shift vectors for the horizontal and vertical components. For each image zone 6, 7, 8, this may yield a first frequency distribution for the horizontal component and a second frequency distribution for the vertical component of the image block shift vectors. An additional movement, i.e., local movement, may be detected by analyzing the frequency distributions assigned to an image zone. If the difference in position between the primary maximum and the largest secondary maximum of one of the two assigned frequency distributions exceeds a certain threshold value, and the size of the primary maximum drops below a threshold value, a local movement may have been detected. Detecting a local or additional movement in an image zone means that the zone shift may not have been determined with a sufficient amount of reliability. Determining the reliability of the zone shift determination thus may result in a negative result as far as zone shift determination is concerned.

Another exemplary method of the present invention is directed to determining a zone shift and determining the reliability of

SUBSTITUTE SPECIFICATION

the zone shift determination and may be described as follows,
with the zone shift including a horizontal and a vertical
component:

- a first frequency distribution of the frequencies of
different values for the horizontal component of the block
shift information is established to determine the horizontal
component of the zone shift, with the horizontal component
of the zone shift corresponding to the value of the
horizontal component of the block shift information for
which the first frequency distribution assumes its primary
maximum;
- a second frequency distribution of the frequencies of
different values for the vertical component of the block
shift information is established to determine the vertical
component of the zone shift, with the vertical component of
the zone shift corresponding to the value of the vertical
component of the block shift information for which the
second frequency distribution assumes its primary maximum;
- the reliability of the zone shift determination is deemed to
be adequate when all of the following conditions have been
met:
 - the absolute value of the difference in position of
the values of the horizontal component of the block shift
information, that correspond to the primary maximum and
the secondary maximum of the first frequency
distribution, is less than a predefined first difference
threshold;
 - the absolute value of the difference in position of
the values of the vertical component of the block shift
information, that correspond to the primary maximum and
the secondary maximum of the second frequency
distribution, is less than a predefined second difference
threshold;
 - the primary maximum of the first frequency
distribution is greater than a first frequency threshold;
and

SUBSTITUTE SPECIFICATION

- the primary maximum of the second frequency distribution is greater than a second frequency threshold.

5 The exemplary method may be used to determine image shifts in an image sequence, thus reducing computing effort.

A criterion may be used that is suitable for detecting local movements within relevant image zone 6, 7, 8, so that the
10 reliability of the zone shift determination is inadequate.

ABSTRACT OF THE DISCLOSURE

A method and a device for determining an image shift in an image sequence may be used, for example, to compensate for a camera movement or other image source movement. A plurality of image zones of images are available to determine the shift, with the zone shift of any given image zone from a plurality of image zones being determined from the image data of, for example, consecutive images within any given image zone. A block matching method or a method using block shift information from a block-based coding method is used to determine the zone shift and to determine a reliability for the zone shift determination.

SUBSTITUTE SPECIFICATION

[10191/1870]

METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE
SEQUENCE

[Background Information

]FIELD OF THE INVENTION

The present invention [is based on a method for determining an
image shift in an image sequence according to the definition
of species in the main claim and according to the definition
of species in alternative independent Claim 4, as well as
a]relates to a method and device for determining an image
shift in an image sequence[according to the definition of
species in alternative independent Claim 12].

BACKGROUND INFORMATION

A picture stabilization system whose function is to maximize
the stability of a picture when shooting with a handheld
camera is [known from]discussed in the [article by H.
Rindtorff entitled]reference "Bildstabilisation in Consumer-
Camcordern, Funktion und Wirkungsweise" (Picture Stabilization
in Consumer Camcorders: Function and Effects)[in], H.
Rindtorff, Fernseh- und Kinotechnik, [Volume]vol. 49, [N]no.
1/2, 1995. [According to this system]As characterized, the
image is divided into four image zones in which motion vectors
that describe the image shift are determined. The motion
vectors in the individual image zones purportedly yield an
overall motion vector which ideally represents the camera
travel.

The entire motion vector is integrated into an attenuation
factor, which means that past vector values are taken into
account, and the magnitude of correction is reduced when the
horizontal and vertical shifts exceed a limit value.

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

[
Advantages of the Invention

The method according to]

5 SUMMARY OF THE INVENTION

10 An exemplary method and/or exemplary embodiment of the present invention [having the features of the main claim has the advantage over the related art] is directed to a method and/or device which provides that the reliability of image shift is not determined separately for the two image zones, but rather the determined shift in one of the two image zones determines the value assumed by the threshold value function and to which the shift of the second of the first two image zones are compared. [T] Another exemplary method of the present invention is directed to providing that the shift determination of one image zone and the determination of shift determination reliability thus do not take place independently of movements, [in particular] for example, zone shifts, in other portions of an image.

20 [The features mentioned in the subordinate claims provide advantageous embodiments and refinements of the method described in the main claim.

25 One particular advantage is that] Another exemplary embodiment and/or exemplary method of the present invention is directed to determining the correlation quotient [is determined], in each case, for one of the plurality of image zones according to [a] an exemplary method having the following steps:

- 30 - shift correlation values are determined for multiple possible image shifts, using a block-matching method;
- the image shift for which maximum shift correlation values are achieved is regarded as a shift in the image zone;
- the correlation quotient is generated from the maximum of
35 shift correlation values, divided by the average of the

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

determined shift correlation values.

This [determines]exemplary embodiment and/or exemplary method of the present invention may be directed to determining the image shift through the entire image zone, since the shift correlation values are derived from a summation across all pixels or a selection of pixels within the image zone in question. [In addition]Further, the correlation quotient [is]may be normalized, since the maximum of the shift correlation values, from which the image shift is obtained, [is]may be divided by the average of the calculated shift correlation values.

Another [advantage is that,]exemplary embodiment and/or exemplary method of the present invention is directed to providing that for any given value of a zone shift that is less than a specified first threshold value, the threshold value function may assume[s] the value of a predefined second threshold value; and for any given value of a zone shift that is greater than the predefined first threshold value, the threshold value function may assume[s] the value of the predefined second threshold value minus a product, the product including a predefined gradient parameter and a difference as factors, and the difference being formed from the given zone shift and the predefined first threshold value. [This has the advantage that]Thus, an adequate reliability [can]may be allowed for determining the zone shift in the case of larger determined shifts in an image zone, even if the correlation quotient is smaller, which [would]may indicate a poorer correlation in the case of a smaller determined image shift. Due to the dependency of the first two image zones in determining reliability for the zone shift determination, the construction of the threshold value function means that the requirements imposed on the reliability of zone shift determination, i.e., the requirements imposed on the level of

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

the correlation quotient[,] may decrease[s] in the use of a relatively large zone shift in one of the first two image zones.

5 [The]Another exemplary embodiment and/or exemplary method
[according to]of the present invention [having the features of
alternative independent Claim 4 has the advantage over the
related art that it enables the method according to the
present invention to be carried out]is directed to providing
10 that the method is performed especially easily and
economically, [particularly if,]for example, the hardware
support [makes it possible to obtain]may allow obtainment of
block shift information, [in particular]for example, block
shift vectors of small image blocks, at little or no
additional cost, [in particular]for example, from a block-
based transmission method for reducing bandwidth.

[The features mentioned in the subordinate claims provide
advantageous embodiments and refinements of the method
described in alternative independent Claim 4.

One particular advantage is that,]Another exemplary embodiment
and/or exemplary method of the present invention is directed
to providing that for each of the image zones, [a]an exemplary
25 method having the following steps [is carried out]may be
performed to determine a zone shift that includes a horizontal
and a vertical component and to determine the reliability of
the zone shift determination:

- a first frequency distribution of the frequencies of
30 different values of the horizontal component of the block
shift information [is]may be established to determine the
horizontal component of the zone shift, with the horizontal
component of the zone shift corresponding to the value of
the horizontal component of the block shift information for
35 which the first frequency distribution may assume[s] its

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

primary maximum;

- a second frequency distribution of the frequencies of different values of the vertical component of the block shift information [is] may be established to determine the vertical component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution may assume[s] its primary maximum; and
- the reliability of the zone shift determination [is] may be deemed to be adequate when all of the following conditions have been met:
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the first frequency distribution, of the horizontal component of the block shift information is less than a predefined first difference threshold;
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the second frequency distribution, of the vertical component of the block shift information is less than a predefined second difference threshold;
 - the primary maximum of the first frequency distribution is greater than a first frequency threshold; and
 - the primary maximum of the second frequency distribution is greater than a second frequency distribution.

[Using simple means, in particular]

Using a relatively "simple" apparatus, arrangement, structure, or methods, such as, for example, monitoring the frequencies of the occurring horizontal and vertical components of the existing block shift information, [it is therefore possible to

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

determine]the zone shift of an image zone [and to
determine]may be determined and the reliability of the zone
shift determination[.

5 According to the subordinate claims of both the main claim and
alternative independent Claim 4, it is furthermore
advantageous to separate] may be determined.

10 Another exemplary embodiment and/or exemplary method of the
present invention is directed to separating an image movement,
[preferably one]for example, produced by camera movement, from
an additional movement that is superimposed on the image
movement in some image zones of the image to be corrected,
using the following steps:

- 15
20
25
30
35
- the probability of an image movement occurring without the
additional movement is determined at different positions in
an image;
 - the position and dimensions are determined and permanently
set for a given image zone as a function of the probability
that the image movement will occur within this one image
zone without the additional movement; and
 - at least one first image zone is given priority for use in
determining the shift.

25 [T]In this [makes it possible to use]way, image zones may be
used for determining image shifts[particularly], for example,
in those portions of an image that [are]may be identified by a
maximum probability that image movement will occur without the
additional movement. The determination of image shifts in an
30 image sequence [can thus]may be [carried out]performed with
particular reliability. [It is also beneficial]Another
exemplary embodiment and/or exemplary method of the present
invention is directed to permanently [specify]specifying the
position and dimensions of the image zones for reliable
35 determination of the image shifts in an image sequence. Thus,

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

the shift [can]may be reliably determined with relatively little processing effort, [in particular]for example, for a special video communications scenario. A first image zone, which [is preferably]may be used to determine the shift, [can]may therefore be employed by selecting its position and dimensions within the images, for example, solely to determine the shift, so that other image zones do not need to be taken into account in this case, which may reduce[s] the processing effort for determining the image shift.

Another [advantage is]exemplary embodiment and/or exemplary method of the present invention is directed to providing that the position and dimensions of the at least one first image zone can be selected so that the at least one first image zone of the images to be corrected are largely filled by the image background. The image background may rarely contain[s] any additional movement that is superimposed on the image movement produced, [in particular]for example, by the unintentional movement of a camera, from one image to another between which the shift is to be determined, which can mean[s] that a first image zone of the images to be corrected [can]may be[advantageously] used to determine the shift, provided that it is filled with the image background.

Another [advantage is]exemplary embodiment and/or exemplary method of the present invention is directed to providing that the position and dimensions of at least one second image zone [can]may be selected so that the at least one second image zone of the images to be corrected is largely filled by the image foreground. [This makes it possible to determine]Thus, a shift in the images of an image sequence may be determined, especially easily and accurately if, for example, the image background is subjected to strong additional movement that is superimposed on the image movement produced, for example, by the unintentional camera movement.

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

Another [advantage is]exemplary embodiment and/or exemplary method of the present invention is directed to providing that both the at least one first image zone and the at least one second image zone are available for determining the shift.

5 [This makes it possible to check]Thus, the zone shift determination[,] may be checked because the exemplary method provides a measure for the reliability of the zone shift determination. A reliability determination for the reliability of the zone shift [thus]may serve[s] primarily to easily and
10 reliably separate the image movement from the additional movement superimposed upon it.

[A further advantage is]Another exemplary embodiment and/or exemplary method of the present invention is directed to providing that two first image zones and a single second image zone are available for image correction, with the shift being determined in at least one of the following[three ways in descending order of priority]:

- from the average of the zone shifts of the two first image zones, when the reliability of the zone shift determination of the first two image sequences is deemed to be adequate;
- from the zone shift of the one of the first two image zones in which the reliability of the zone shift determination is deemed to be adequate; and
- 25 - from the zone shift of the second image zone.

[This makes it possible to use d]Different image zones having different priorities for determining the image shifts in an image sequence may be used. [In particular, it is possible to
30 give]For example, priority may be given to the use of image zones that are largely filled by the image background for determining the image shifts, with the use of the average of the zone shifts in the first two image zones yielding a reliable shift determination. The second priority for
35 determining the shift, using the zone shift from the first two

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

image zones, [is] may be selected, [in particular] for example, to minimize the influence of moving objects in the background, since a moving object in one of the two first image zones may mean[s] that the zone shift in the other of the two image zones is used to determine the image shifts in an image sequence. On the third level of priority, the image may shift[s] from the zone shift of the second image zone, [in particular] for example, an image zone that is largely filled by the image background, [is used].

It is also advantageous to use the method] may be used.

Another exemplary embodiment and/or exemplary method of the present invention is directed to providing for a head-and-shoulder shot, with the first two image zones being selected in a side image zone on the left and right, [preferably] for example, symmetrically to the vertical center axis of a predefined rectangular image, with the distance of the first two image zones from the bottom of the image being greater than the distance of the first two image zones from the top of the image; the second image zone in the center of the image being selected, [preferably] for example, symmetrically to the vertical center axis of the rectangular image; the distance of the second image zone from the top edge [preferably], for example, being greater than the distance of the second image zone from the bottom edge. [Selecting t] The image zones [in] may be selected so th[is manner makes it possible] ac, for example, [particularly] in a head-and-shoulder shot, to rationally use information from the image zones for determining the zone shifts and for determining image shifts in an image sequence, based on a system of priorities.

[T] Another device according to] r exemplary embodiment and/or exemplary method of the present invention [for] is directed to determining image shifts in an image sequence [having the

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

features of alternative independent Claim 12 has the advantage over the related art that the device]and includes a shift detecting circuit (100) and an enlarging circuit (200), with the shift detecting circuit (100) including a zone shift detector (110), an image storage device (120) and a microcomputer (130); and the shift detecting circuit (100) determining the shift (15). Thus, the shift [can]may result in faster and more economical performance of [the]an exemplary method [according]of to the present invention, [in particular]for example, by implementing the steps of the exemplary method [according to]of the present invention[as described in the main claim and alternative independent Claim 4], [respectively]for example, in an integrated circuit or on a [p.c. board.

Brief Description of the Drawing

One embodiment of the present invention is explained in greater detail in the following description and illustrated in the drawing, where.

Figure 1]personal computer (pc) board.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a block diagram of [the device according to]an exemplary embodiment of the present invention[;].

Figure 2 []shows[the principle] the picture stabilization system by determining an image shift in an image sequence[;].

Figure 3 []shows a flowchart of the picture stabilization system[; and].

Figure 4 []shows[an example for] selecting image zones

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

within an image for [carrying out
the]performing an exemplary method [according
to]of the present invention.

5 [Description of the Embodiment

]DETAILED DESCRIPTION

Figure 1 shows a block diagram of [the]an exemplary device
[according to]of the present invention for implementing the
exemplary method of determining an image shift in an image
sequence. The exemplary device [according to]of the present
invention may include[s] an input 10, an output 20, a shift
detecting circuit 100, and an enlarging circuit 200. Shift
detecting circuit 100 may include[s] zone shift detector 110,
an image storage device 120, and a microcomputer 130. Shift
detecting circuit 100 may also include[s] an input (not
illustrated) that [is]may be connected to input 10 of the
exemplary device [according to]of the present invention as
well as to zone shift detector 110 and image storage device
120. Shift detecting circuit 100 [further]may also include[s]
an output (not illustrated) that [is]may be connected to
microcomputer 130, with zone shift detector 110 also being
connected to microcomputer 130. Enlarging circuit 200 may
include[s] two inputs (not illustrated) and one output that
[is]may be connected to output 20 of the device. The two
inputs of enlarging circuit 200 [are]may each be connected to
an enlarging processor 210, with one of the two inputs of
enlarging circuit 200 being connected to input 10 of the
device; and the other of the two inputs of enlarging circuit
200 being connected to the output of shift detecting circuit
100.

Figure 2 shows an example of the picture stabilization system,
for example, to compensate for camera movements. A first input
image 13 [is]may be corrected to form a first output image 23,
using image information of a second, [preferably]for example,

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

earlier, input image 11.

Second input image 11 includes an image segment that is enlarged by increasing its size to form second output image 21. Second input image 11 is completely picked up by the camera, although a user of [the]an exemplary device [according to]of the present invention may see[s], for example, only the enlarged segment in the form of second output image 21. The segment [is]may be referred to as second image 12 or as corrected second image 12.

According to a first [embodiment of the]exemplary method [according to]of the present invention, corrected second image 12 [is]may be used to correct first input image 13. First input image 13 may also include[s] an image segment that is referred to here as uncorrected first image 14. Comparing uncorrected first image 14 to second image 12, i.e., corrected first image 12, [makes it possible to determine]allows for a determination of a shift 15 so that uncorrected first image 14 [is]may be converted to a corrected first image 16 as a result of shift 15. The comparison of uncorrected first image 14 to second image 12, [in particular]for example, [does]may not involve using all the image data, but rather only the image data from the image zones (not illustrated) of first image 14 and second image 12.

According to a second [embodiment of the]exemplary method according to the present invention, second input image 11 [is]may be used to correct first input image 13. Comparing first input image 13 to second input image 11 [makes it possible to determine]may allow a determination of a shift 15 so that uncorrected first image 14 [can]may be converted to corrected first image 16 as a result of shift 15. The comparison of uncorrected first input image 13 to second input image 11, [in particular]for example, [does]may not involve

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

using all the image data, but rather only the image data from the image zones (not illustrated) of first input image 13 and second input image 11.

5 According to both [the first embodiment and the second embodiment of the method according to the present invention]exemplary methods, corrected first image 16 [can]may now be displayed for the user in the form of first output image 23. Compared to the second output image, the shift of
10 first input image 13, i.e., corrected first image 16, respectively, [can]may no longer be seen in first output image 23.

Figure 3 shows [the main]steps [in the]of an exemplary method [according to]of the present invention[on the basis of the flowchart], using the correction of first input image 13 as an example. The zone shifts of image zones [are]may be determined in a first step 30. First input image 13 [is]may be compared to corrected, [in particular]for example, directly preceding second image 12 or to second, [in particular]for example, directly preceding input for starting image 11. The shift of first image 14 [is]may be subsequently determined in a step 40 in [the]an exemplary method [according to]of the present invention. Uncorrected first image 14 [is]may be shifted by
25 shift vector 15 in a third step 50. This operation may yield[s] corrected first image 16. Corrected first image 16 [is]may then be enlarged in a fourth step 60, resulting in first output image 23.

30 To correct a further input image using [the]an exemplary method according to the present invention, the result of third step 50 [can]may be supplied to first step 30 by storing the image, [preferably]for example, in image storage device 120. Third step 50 may yield[s] corrected first image 16, which
35 thus may replace[s] corrected second image 12 and [is]may be

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

used in conjunction with the correction of the further input image to determine zone shifts in first step 30.

Alternatively, first input image 13, i.e., uncorrected first image 14, [can]may be stored in image storage device 120 together with determined shift 15 for correcting a further input image.

Figure 4 shows an example of a distribution of image segments 6, 7, 8 within first input image 14. Two first image zones 6, 7 [are]may be selected, [in particular]for example, for applying [the]an exemplary method [according to]of the present invention to a head-and-shoulder shot, symmetrically to the vertical center axis of the given rectangular first image 14. The distance of first two image zones 6,7 from the bottom of the image [is]may be greater than the distance of first two image zones 6, 7 from the top of the image.

A second image zone 8 [is]may be selected in the center of first image 14, [preferably]for example, symmetrically to the vertical center axis of the rectangular image, with the distance of second image zone 8 from the top of the image preferably being greater than the distance of the second image zone from the bottom of the image.

[The]An exemplary method [according to]of the present invention [for]may be directed to determining a shift 15 of images in an image sequence [can preferably]and may be used for picture stabilization to compensate for camera movements with regard to digital video stabilization in mobile video communications equipment. [The goal is to]This may reduce [and, if possible,]and/or eliminate movements caused by the mobile use of video communications equipment.

The [basic principle behind the]exemplary method may i[s to

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

derive] involve deriving the camera movement from the relative shift in consecutive images and [to extract] extracting from one input image, e.g., first input image 13, the segment, for example, corrected first image 16, that compensates for the camera movement on the basis of determined shift 15, [in particular] for example, of corrected first image 16 relative to uncorrected first image 14.

With the exemplary method [according to] of the present invention, for example, a plurality of image zones 6, 7, 8 [is] may be provided for determining shift 15. The image zones [can] may be clearly determined by their positions and dimensions within the image. By [advantageously] selecting the position and dimensions of image zones 6, 7, 8, it [is especially] may be easy to separate an image movement that is [preferably] produced by a camera movement from an additional movement that is superimposed on the image movement in segments of the image to be corrected.

For this purpose, the probability that the image movement will occur without the additional movement [is] may be determined in different positions of the images in an image sequence, yielding preferred components within the image that can be used to separate the image movement from the additional movement. For example, selecting image zones 6, 7, 8 illustrated in Figure 4 [is particularly advantageous] may be useful for the special shooting situation of a speaker which is centered in the image. The special characteristics of this shooting situation [are] may be utilized as a-priori factors in selecting and defining image zones 6, 7, 8.

According to this shooting situation, [we can assume] for example, th[at] the first two image zones 6, 7 are assumed to be largely located in the image background, while second image zone 8 is assumed to be largely in the foreground. This means

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

that first two image zones 6, 7 [are]may be primarily filled with image data from the image background, while second image zone 8 [is]may be primarily filled with image data from the image foreground. This [makes it possible to advantageously
5 prioritize]can allow a prioritization of first two image zones 6, 7, thereby determining a shift 15 of images in an image sequence[preferably], for example, by determining the zone shift in first two image zones 6, 7. Second image zone 8 [is]may be used to determine image shift 15 only if the use of
10 zone shifts from first two image zones 6, 7 allows for only a zone shift that is subject to high unreliability, i.e., to an insufficiently strong reliability.

In the example given, this prioritization means that picture stabilization [is preferably carried out]may be performed with image background information. However, the exemplary methods in this case do not apply exclusively to distinguishing and setting different priorities to determine a shift in images in an image sequence from background and foreground information, but also, for example, to using criteria such as edge determination, absence of edge determination and the like.

[F]The first two image zones 6,7 in the example given [typically]may have a length of 120 pixels in the vertical direction and 40 pixels in the horizontal direction in Qcif
25 format. In this format, second image zone 8 [typically]may measure[s] 135 pixels in the vertical direction and 85 pixels in the horizontal direction.

[The]Another exemplary method [according to]of the present invention [for]is directed to determining a shift 15 in images in an image sequence which also serves to minimize the influence of moving objects, [in particular]for example, in the image background, by using a decision criterion to detect
35 moving objects in image zones. The moving objects, for

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

example, in one of image zones 6, 7, 8 may produce[s] an additional movement that is superimposed on the shift produced by the camera movement.

5 To determine the zone shift for an image zone 6, 7, 8, two alternative methods [are]may be used according to the present invention, depending on whether[or not] block shift information from a block-based coding method, for example, a block-based transmission method for reducing bandwidth, is
10 accessible [with simple means]using a relatively "simple" apparatus, arrangement, structure or method. If the block shift information is not easily accessible, a block-matching method [according to the]ma[in claim is preferably]y be used to determine the zone shift, making it possible to detect an additional movement, i.e., a local movement, within one of two first image zones 6, 7. A local movement occurring in an image zone 6, 7, 8, e.g., an emerging object, [can]may be detected by evaluating the shift correlation values from the block matching method. To do this, the ratio between the average of the shift correction values and the maximum of the correlation values [is]may be compared with an adaptive threshold value function.

To determine the average of the shift correlation values, the
25 sum of all determined correlation values [is]may be formed and subsequently divided by the number of these values. The maximum of the shift correlation values [is]may be assumed for a determined zone shift. The zone shift corresponding to the maximum of the shift correlation values [is]may be assumed as
30 the zone shift of the image zone. The correlation quotient may correspond[s] to the maximum of shift correlation values, divided by the average of the shift correlation values, and [is]may thus be normalized. An additional movement, i.e., a local movement within the image zone, [is]may be detected if
35 the correlation quotient is less than the value of an adaptive

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

threshold value function. The adaptive threshold value function [is]may be dependent on the length of a shift vector that indicates a zone shift.[]

5 According to the exemplary embodiment and/or exemplary method of the present invention, the correlation quotient for first image zone 6, 7 [in question is]may be compared to the value of the adaptive threshold value function to detect an additional movement, i.e., a local movement, in one of first
10 two image zones 6, 7, the vector length of shift 15 of the other of first two image zones 6, 7 yielding the value for the adaptive threshold value function. The threshold value function [is]may be defined as follows:

- for any given vector length of the zone shift vector, i.e., for any given zone shift that is smaller than a predefined first threshold value, the threshold value function may assume[s] a predefined second threshold value;
- for any given vector length of the zone shift vector, i.e., for any given zone shift that is greater than the predefined first threshold value, the threshold value function may assume[s] the value of the predefined second threshold value minus a product, with the product including a predefined gradient parameter and a difference as factors[;], and with the difference being derived from the given zone shift and
25 the predefined first threshold value.

[The]Another exemplary method for determining image shifts in an image sequence [according to alternative independent Claim 4 is]may be based, [in particular]for example, on the use of
30 block shift information from a block-based coding method. The shift vectors of small blocks, e.g., having a size of 8 x 8 or 16 x 16, [are]may be used to determine the zone shift in image zones 6, 7, 8. The information from the block-based coding method [is]may thus be used to reduce computing effort. This
35 approach [is especially]may be attractive if the block shift

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

vectors need to be obtained with little or no additional effort, for example, using hardware support. Detecting local movement in an image zone 6, 7, 8, [especially]for example, in one of first two image zones 6, 7, [can]may be accomplished with relative ease if shift vectors of small blocks in the image are [known]available.

Initially, all shift vectors for blocks located in one of image zones 6, 7, 8 [are]may be assigned to corresponding image zone 6, 7, 8. Separate frequency distributions, i.e., histograms, [are]may be created from the assigned shift vectors for the horizontal and vertical components. For each image zone 6, 7, 8, this may yield[s] a first frequency distribution for the horizontal component and a second frequency distribution for the vertical component of the image block shift vectors. An additional movement, i.e., local movement, [is]may be detected by analyzing the frequency distributions assigned to an image zone. If the difference in position between the primary maximum and the largest secondary maximum of one of the two assigned frequency distributions exceeds a certain threshold value, and the size of the primary maximum drops below a threshold value, a local movement may ha[s]ve been detected.

Detecting a local or additional movement in an image zone means that the zone shift [could]may not have been determined with a sufficient amount of reliability. Determining the reliability of the zone shift determination thus may result[s] in a negative result as far as zone shift determination is concerned.

[The]Another exemplary method [according to alternative independent Claim 4 for]of the present invention is directed to determining a zone shift and determining the reliability of the zone shift determination [can]and may be described as follows, with the zone shift including a horizontal and a

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

vertical component:

- a first frequency distribution of the frequencies of different values for the horizontal component of the block shift information is established to determine the horizontal component of the zone shift, with the horizontal component of the zone shift corresponding to the value of the horizontal component of the block shift information for which the first frequency distribution assumes its primary maximum;
- a second frequency distribution of the frequencies of different values for the vertical component of the block shift information is established to determine the vertical component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution assumes its primary maximum;
- the reliability of the zone shift determination is deemed to be adequate when all of the following conditions have been met:
 - the absolute value of the difference in position of the values of the horizontal component of the block shift information, that correspond to the primary maximum and the secondary maximum of the first frequency distribution, is less than a predefined first difference threshold;
 - the absolute value of the difference in position of the values of the vertical component of the block shift information, that correspond to the primary maximum and the secondary maximum of the second frequency distribution, is less than a predefined second difference threshold;
 - the primary maximum of the first frequency distribution is greater than a first frequency threshold; and
 - the primary maximum of the second frequency

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

distribution is greater than a second frequency threshold.

5 The exemplary method [according to alternative independent Claim 4 can thus]may be used to determine image shifts in an image sequence, thus reducing computing effort.

10 A criterion may be used that is suitable for detecting local movements within relevant image zone 6, 7, 8, [and which therefore means]so that the reliability of the zone shift determination is inadequate[, was given for both the method according to the main claim and the method according to alternative independent Claim 4.

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

Abstract

Two methods are described for determining an image shift (15) in an image sequence and one].

5

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224

ABSTRACT OF THE DISCLOSURE

A method and a device for determining an image shift [(15)] in an image sequence[,] may be used, [in particular]for example, to compensate for a camera movement or other image source movement. A plurality of image zones[(6, 7, 8)] of images are available to determine the shift[(15)], with the zone shift of any given image zone [(6, 7, 8)] from a plurality of image zones[(6, 7, 8)] being determined from the image data of[preferably], for example, consecutive images[(14, 12)] within any given image zone[(6, 7, 8); a]. A block matching method or a method using block shift information from a block-based coding method [being]is used to determine the zone shift and to determine a reliability for the zone shift determination. [

(Figure 3)]

MARKED UP VERSION OF THE SUBSTITUTE SPECIFICATION

2/pr/2

METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE
SEQUENCE

Background Information

5 The present invention is based on a method for determining an
image shift in an image sequence according to the definition
of species in the main claim and according to the definition
of species in alternative independent Claim 4, as well as a
device for determining an image shift in an image sequence
according to the definition of species in alternative
independent Claim 12. A picture stabilization system whose
function is to maximize the stability of a picture when
shooting with a handheld camera is known from the article by
H. Rindtorff entitled "Bildstabilisation in Consumer-
Camcordern, Funktion und Wirkungsweise" (Picture Stabilization
in Consumer Camcorders: Function and Effects) in Fernseh- und
Kinotechnik, Volume 49, No. 1/2, 1995. According to this
system, the image is divided into four image zones in which
motion vectors that describe the image shift are determined.
The motion vectors in the individual image zones yield an
overall motion vector which ideally represents the camera
travel.

20 The entire motion vector is integrated into an attenuation
factor, which means that past vector values are taken into
account, and the magnitude of correction is reduced when the
25 horizontal and vertical shifts exceed a limit value.

Advantages of the Invention

30 The method according to the present invention having the
features of the main claim has the advantage over the related
art that the reliability of image shift is not determined
separately for the two image zones, but rather the determined
shift in one of the two image zones determines the value

assumed by the threshold value function and to which the shift of the second of the first two image zones are compared. The shift determination of one image zone and the determination of shift determination reliability thus do not take place independently of movements, in particular zone shifts, in other portions of an image.

The features mentioned in the subordinate claims provide advantageous embodiments and refinements of the method described in the main claim.

One particular advantage is that the correlation quotient is determined, in each case, for one of the plurality of image zones according to a method having the following steps:

- shift correlation values are determined for multiple possible image shifts, using a block-matching method;
- the image shift for which maximum shift correlation values are achieved is regarded as a shift in the image zone;
- the correlation quotient is generated from the maximum of shift correlation values, divided by the average of the determined shift correlation values.

This determines the image shift through the entire image zone, since the shift correlation values are derived from a summation across all pixels or a selection of pixels within the image zone in question. In addition, the correlation quotient is normalized, since the maximum of the shift correlation values, from which the image shift is obtained, is divided by the average of the calculated shift correlation values.

Another advantage is that, for any given value of a zone shift that is less than a specified first threshold value, the threshold value function assumes the value of a predefined second threshold value; and for any given value of a zone shift that is greater than the predefined first threshold value, the threshold value function assumes the value of the predefined second threshold value minus a product, the product including a predefined gradient parameter and a difference as factors, and the difference being formed from the given zone

shift and the predefined first threshold value. This has the advantage that an adequate reliability can be allowed for determining the zone shift in the case of larger determined shifts in an image zone, even if the correlation quotient is smaller, which would indicate a poorer correlation in the case of a smaller determined image shift. Due to the dependency of the first two image zones in determining reliability for the zone shift determination, the construction of the threshold value function means that the requirements imposed on the reliability of zone shift determination, i.e., the requirements imposed on the level of the correlation quotient, decreases in the use of a relatively large zone shift in one of the first two image zones.

The method according to the present invention having the features of alternative independent Claim 4 has the advantage over the related art that it enables the method according to the present invention to be carried out especially easily and economically, particularly if, for example, hardware support makes it possible to obtain block shift information, in particular block shift vectors of small image blocks, at little or no additional cost, in particular from a block-based transmission method for reducing bandwidth.

The features mentioned in the subordinate claims provide advantageous embodiments and refinements of the method described in alternative independent Claim 4.

One particular advantage is that, for each of the image zones, a method having the following steps is carried out to determine a zone shift that includes a horizontal and a vertical component and to determine the reliability of the zone shift determination:

- a first frequency distribution of the frequencies of different values of the horizontal component of the block shift information is established to determine the horizontal component of the zone shift, with the horizontal component of the zone shift corresponding to the value of the horizontal component of the block shift information for

which the first frequency distribution assumes its primary maximum;

- a second frequency distribution of the frequencies of different values of the vertical component of the block shift information is established to determine the vertical component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution assumes its primary maximum;
- the reliability of the zone shift determination is deemed to be adequate when all of the following conditions have been met:
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the first frequency distribution, of the horizontal component of the block shift information is less than a predefined first difference threshold;
 - the absolute value of the difference between the position of the values, corresponding to the primary maximum and the secondary maximum of the second frequency distribution, of the vertical component of the block shift information is less than a predefined second difference threshold;
 - the primary maximum of the first frequency distribution is greater than a first frequency threshold;
 - the primary maximum of the second frequency distribution is greater than a second frequency distribution.

Using simple means, in particular monitoring the frequencies of the occurring horizontal and vertical components of the existing block shift information, it is therefore possible to determine the zone shift of an image zone and to determine the reliability of the zone shift determination.

According to the subordinate claims of both the main claim and alternative independent Claim 4, it is furthermore advantageous to separate an image movement, preferably one produced by camera movement, from an additional movement that is superimposed on the image movement in some image zones of

the image to be corrected, using the following steps:

- the probability of an image movement occurring without the additional movement is determined at different positions in an image;
- 5 - the position and dimensions are determined and permanently set for a given image zone as a function of the probability that the image movement will occur within this one image zone without the additional movement;
- at least one first image zone is given priority for use in
10 determining the shift.

15 This makes it possible to use image zones for determining image shifts particularly in those portions of an image that are identified by a maximum probability that image movement will occur without the additional movement. The determination of image shifts in an image sequence can thus be carried out with particular reliability. It is also beneficial to permanently specify the position and dimensions of the image zones for reliable determination of the image shifts in an
20 image sequence. Thus, the shift can be reliably determined with relatively little processing effort, in particular for a special video communications scenario. A first image zone, which is preferably used to determine the shift, can therefore be employed by selecting its position and dimensions within
25 the images, for example solely to determine the shift, so that other image zones do not need to be taken into account in this case, which reduces the processing effort for determining the image shift.

30 Another advantage is that the position and dimensions of the at least one first image zone can be selected so that the at least one first image zone of the images to be corrected are largely filled by the image background. The image background rarely contains any additional movement that is superimposed
35 on the image movement produced, in particular, by the unintentional movement of a camera, from one image to another between which the shift is to be determined, which means that a first image zone of the images to be corrected can be advantageously used to determine the shift, provided that it

is filled with the image background.

Another advantage is that the position and dimensions of at least one second image zone can be selected so that the at least one second image zone of the images to be corrected is largely filled by the image foreground. This makes it possible to determine a shift in the images of an image sequence especially easily and accurately if, for example, the image background is subjected to strong additional movement that is superimposed on the image movement produced, for example, by the unintentional camera movement.

Another advantage is that both the at least one first image zone and the at least one second image zone are available for determining the shift. This makes it possible to check the zone shift determination, because the method provides a measure for the reliability of the zone shift determination. A reliability determination for the reliability of the zone shift thus serves primarily to easily and reliably separate the image movement from the additional movement superimposed upon it.

A further advantage is that two first image zones and a single second image zone are available for image correction, with the shift being determined in one of the following three ways in descending order of priority:

- from the average of the zone shifts of the two first image zones, when the reliability of the zone shift determination of the first two image sequences is deemed to be adequate;
- from the zone shift of the one of the first two image zones in which the reliability of the zone shift determination is deemed to be adequate;
- from the zone shift of the second image zone.

This makes it possible to use different image zones having different priorities for determining the image shifts in an image sequence. In particular, it is possible to give priority to the use of image zones that are largely filled by the image background for determining the image shifts, with the use of

the average of the zone shifts in the first two image zones yielding a reliable shift determination. The second priority for determining the shift, using the zone shift from the first two image zones, is selected, in particular, to minimize the influence of moving objects in the background, since a moving object in one of the two first image zones means that the zone shift in the other of the two image zones is used to determine the image shifts in an image sequence. On the third level of priority, the image shifts from the zone shift of the second image zone, in particular an image zone that is largely filled by the image background, is used.

It is also advantageous to use the method for a head-and-shoulder shot, with the first two image zones being selected in a side image zone on the left and right, preferably symmetrically to the vertical center axis of a predefined rectangular image, with the distance of the first two image zones from the bottom of the image being greater than the distance of the first two image zones from the top of the image; the second image zone in the center of the image being selected, preferably symmetrically to the vertical center axis of the rectangular image; the distance of the second image zone from the top edge preferably being greater than the distance of the second image zone from the bottom edge. Selecting the image zones in this manner makes it possible, particularly in a head-and-shoulder shot, to rationally use information from the image zones for determining the zone shifts and for determining image shifts in an image sequence, based on a system of priorities.

The device according to the present invention for determining image shifts in an image sequence having the features of alternative independent Claim 12 has the advantage over the related art that the device includes a shift detecting circuit (100) and an enlarging circuit (200), with the shift detecting circuit (100) including a zone shift detector (110), an image storage device (120) and a microcomputer (130); and the shift detecting circuit (100) determining the shift (15). Thus, the shift can result in faster and more economical performance of

the method according to the present invention, in particular by implementing the steps of the method according to the present invention as described in the main claim and alternative independent Claim 4, respectively, in an integrated circuit or on a p.c. board.

Brief Description of the Drawing

One embodiment of the present invention is explained in greater detail in the following description and illustrated in the drawing, where.

Figure 1 shows a block diagram of the device according to the present invention;

Figure 2 shows the principle the picture stabilization system by determining an image shift in an image sequence;

Figure 3 shows a flowchart of the picture stabilization system; and

Figure 4 shows an example for selecting image zones within an image for carrying out the method according to the present invention.

Description of the Embodiment

Figure 1 shows a block diagram of the device according to the present invention for determining an image shift in an image sequence. The device according to the present invention includes an input 10, an output 20, a shift detecting circuit 100, and an enlarging circuit 200. Shift detecting circuit 100 includes zone shift detector 110, an image storage device 120, and a microcomputer 130. Shift detecting circuit 100 also includes an input (not illustrated) that is connected to input 10 of the device according to the present invention as well as to zone shift detector 110 and image storage device 120. Shift detecting circuit 100 further includes an output (not illustrated) that is connected to microcomputer 130, with zone

shift detector 110 also being connected to microcomputer 130. Enlarging circuit 200 includes two inputs (not illustrated) and one output that is connected to output 20 of the device. The two inputs of enlarging circuit 200 are each connected to an enlarging processor 210, with one of the two inputs of enlarging circuit 200 being connected to input 10 of the device; and the other of the two inputs of enlarging circuit 200 being connected to the output of shift detecting circuit 100.

Figure 2 shows an example of the picture stabilization system, for example, to compensate for camera movements. A first input image 13 is corrected to form a first output image 23, using image information of a second, preferably earlier, input image 11.

Second input image 11 includes an image segment that is enlarged by increasing its size to form second output image 21. Second input image 11 is completely picked up by the camera, although a user of the device according to the present invention sees, for example, only the enlarged segment in the form of second output image 21. The segment is referred to as second image 12 or as corrected second image 12.

According to a first embodiment of the method according to the present invention, corrected second image 12 is used to correct first input image 13. First input image 13 also includes an image segment that is referred to here as uncorrected first image 14. Comparing uncorrected first image 14 to second image 12, i.e., corrected first image 12, makes it possible to determine a shift 15 so that uncorrected first image 14 is converted to a corrected first image 16 as a result of shift 15. The comparison of uncorrected first image 14 to second image 12, in particular, does not involve using all the image data, but rather only the image data from the image zones (not illustrated) of first image 14 and second image 12.

According to a second embodiment of the method according to

the present invention, second input image 11 is used to correct first input image 13. Comparing first input image 13 to second input image 11 makes it possible to determine a shift 15 so that uncorrected first image 14 can be converted to corrected first image 16 as a result of shift 15. The comparison of uncorrected first input image 13 to second input image 11, in particular, does not involve using all the image data, but rather only the image data from the image zones (not illustrated) of first input image 13 and second input image 11.

According to both the first embodiment and the second embodiment of the method according to the present invention, corrected first image 16 can now be displayed for the user in the form of first output image 23. Compared to the second output image, the shift of first input image 13, i.e., corrected first image 16, respectively, can no longer be seen in first output image 23.

Figure 3 shows the main steps in the method according to the present invention on the basis of the flowchart, using the correction of first input image 13 as an example. The zone shifts of image zones are determined in a first step 30. First input image 13 is compared to corrected, in particular, directly preceding second image 12 or to second, in particular, directly preceding input image 11. The shift of first image 14 is subsequently determined in a step 40 in the method according to the present invention. Uncorrected first image 14 is shifted by shift vector 15 in a third step 50. This operation yields corrected first image 16. Corrected first image 16 is then enlarged in a fourth step 60, resulting in first output image 23.

To correct a further input image using the method according to the present invention, the result of third step 50 can be supplied to first step 30 by storing the image, preferably in image storage device 120. Third step 50 yields corrected first image 16, which thus replaces corrected second image 12 and is used in conjunction with the correction of the further input

image to determine zone shifts in first step 30.

Alternatively, first input image 13, i.e., uncorrected first image 14, can be stored in image storage device 120 together with determined shift 15 for correcting a further input image.

Figure 4 shows an example of a distribution of image segments 6, 7, 8 within first input image 14. Two first image zones 6, 7 are selected, in particular, for applying the method according to the present invention to a head-and-shoulder shot, symmetrically to the vertical center axis of the given rectangular first image 14. The distance of first two image zones 6,7 from the bottom of the image is greater than the distance of first two image zones 6, 7 from the top of the image.

A second image zone 8 is selected in the center of first image 14, preferably symmetrically to the vertical center axis of the rectangular image, with the distance of second image zone 8 from the top of the image preferably being greater than the distance of the second image zone from the bottom of the image.

The method according to the present invention for determining a shift 15 of images in an image sequence can preferably be used for picture stabilization to compensate for camera movements with regard to digital video stabilization in mobile video communications equipment. The goal is to reduce and, if possible, eliminate movements caused by the mobile use of video communications equipment.

The basic principle behind the method is to derive the camera movement from the relative shift in consecutive images and to extract from one input image, e.g., first input image 13, the segment, for example corrected first image 16, that compensates for the camera movement on the basis of determined shift 15, in particular, of corrected first image 16 relative to uncorrected first image 14.

With the method according to the present invention, for

example, a plurality of image zones 6, 7, 8 is provided for determining shift 15. The image zones can be clearly determined by their positions and dimensions within the image. By advantageously selecting the position and dimensions of image zones 6, 7, 8, it is especially easy to separate an image movement that is preferably produced by a camera movement from an additional movement that is superimposed on the image movement in segments of the image to be corrected. For this purpose, the probability that the image movement will occur without the additional movement is determined in different positions of the images in an image sequence, yielding preferred components within the image that can be used to separate the image movement from the additional movement. For example, selecting image zones 6, 7, 8 illustrated in Figure 4 is particularly advantageous for the special shooting situation of a speaker which is centered in the image. The special characteristics of this shooting situation are utilized as a-priori factors in selecting and defining image zones 6, 7, 8. According to this shooting situation, we can assume that first two image zones 6, 7 are largely located in the image background, while second image zone 8 is largely in the foreground. This means that first two image zones 6, 7 are primarily filled with image data from the image background, while second image zone 8 is primarily filled with image data from the image foreground. This makes it possible to advantageously prioritize first two image zones 6, 7, thereby determining a shift 15 of images in an image sequence preferably by determining the zone shift in first two image zones 6, 7. Second image zone 8 is used to determine image shift 15 only if the use of zone shifts from first two image zones 6, 7 allows for only a zone shift that is subject to high unreliability, i.e., to an insufficiently strong reliability. In the example given, this prioritization means that picture stabilization is preferably carried out with image background information. However, the methods in this case do not apply exclusively to distinguishing and setting different priorities to determine a shift in images in an image sequence from background and foreground information, but also, for example, to using criteria such as edge

determination, absence of edge determination and the like.

First two image zones 6,7 in the example given typically have a length of 120 pixels in the vertical direction and 40 pixels in the horizontal direction in Qcif format. In this format, second image zone 8 typically measures 135 pixels in the vertical direction and 85 pixels in the horizontal direction.

The method according to the present invention for determining a shift 15 in images in an image sequence also serves to minimize the influence of moving objects, in particular in the image background, by using a decision criterion to detect moving objects in image zones. The moving objects, for example, in one of image zones 6, 7, 8 produces an additional movement that is superimposed on the shift produced by the camera movement.

To determine the zone shift for an image zone 6, 7, 8, two alternative methods are used according to the present invention, depending on whether or not block shift information from a block-based coding method, for example a block-based transmission method for reducing bandwidth, is accessible with simple means. If the block shift information is not easily accessible, a block-matching method according to the main claim is preferably used to determine the zone shift, making it possible to detect an additional movement, i.e., a local movement, within one of two first image zones 6, 7. A local movement occurring in an image zone 6, 7, 8, e.g., an emerging object, can be detected by evaluating the shift correlation values from the block matching method. To do this, the ratio between the average of the shift correction values and the maximum of the correlation values is compared with an adaptive threshold value function. To determine the average of the shift correlation values, the sum of all determined correlation values is formed and subsequently divided by the number of these values. The maximum of the shift correlation values is assumed for a determined zone shift. The zone shift corresponding to the maximum of the shift correlation values is assumed as the zone shift of the image zone. The

correlation quotient corresponds to the maximum of shift correlation values, divided by the average of the shift correlation values, and is thus normalized. An additional movement, i.e., a local movement within the image zone, is detected if the correlation quotient is less than the value of an adaptive threshold value function. The adaptive threshold value function is dependent on the length of a shift vector that indicates a zone shift. According to the present invention, the correlation quotient for first image zone 6, 7 in question is compared to the value of the adaptive threshold value function to detect an additional movement, i.e., a local movement, in one of first two image zones 6, 7, the vector length of shift 15 of the other of first two image zones 6, 7 yielding the value for the adaptive threshold value function. The threshold value function is defined as follows:

- for any given vector length of the zone shift vector, i.e., for any given zone shift that is smaller than a predefined first threshold value, the threshold value function assumes a predefined second threshold value;
- for any given vector length of the zone shift vector, i.e., for any given zone shift that is greater than the predefined first threshold value, the threshold value function assumes the value of the predefined second threshold value minus a product, with the product including a predefined gradient parameter and a difference as factors; and with the difference being derived from the given zone shift and the predefined first threshold value.

The method for determining image shifts in an image sequence according to alternative independent Claim 4 is based, in particular, on the use of block shift information from a block-based coding method. The shift vectors of small blocks, e.g., having a size of 8 x 8 or 16 x 16, are used to determine the zone shift in image zones 6, 7, 8. The information from the block-based coding method is thus used to reduce computing effort. This approach is especially attractive if the block shift vectors need to be obtained with little or no additional effort, for example using hardware support. Detecting local movement in an image zone 6, 7, 8, especially in one of first

two image zones 6, 7, can be accomplished with relative ease if shift vectors of small blocks in the image are known. Initially, all shift vectors for blocks located in one of image zones 6, 7, 8 are assigned to corresponding image zone 6, 7, 8. Separate frequency distributions, i.e., histograms, are created from the assigned shift vectors for the horizontal and vertical components. For each image zone 6, 7, 8, this yields a first frequency distribution for the horizontal component and a second frequency distribution for the vertical component of the image block shift vectors. An additional movement, i.e., local movement, is detected by analyzing the frequency distributions assigned to an image zone. If the difference in position between the primary maximum and the largest secondary maximum of one of the two assigned frequency distributions exceeds a certain threshold value, and the size of the primary maximum drops below a threshold value, a local movement has been detected.

Detecting a local or additional movement in an image zone means that the zone shift could not be determined with a sufficient amount of reliability. Determining the reliability of the zone shift determination thus results in a negative result as far as zone shift determination is concerned.

The method according to alternative independent Claim 4 for determining a zone shift and determining the reliability of the zone shift determination can be described as follows, with the zone shift including a horizontal and a vertical component:

- a first frequency distribution of the frequencies of different values for the horizontal component of the block shift information is established to determine the horizontal component of the zone shift, with the horizontal component of the zone shift corresponding to the value of the horizontal component of the block shift information for which the first frequency distribution assumes its primary maximum;
- a second frequency distribution of the frequencies of different values for the vertical component of the block shift information is established to determine the vertical

component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution assumes its primary maximum;

5 - the reliability of the zone shift determination is deemed to be adequate when all of the following conditions have been met:

- 10 - the absolute value of the difference in position of the values of the horizontal component of the block shift information, that correspond to the primary maximum and the secondary maximum of the first frequency distribution, is less than a predefined first difference threshold;
- 15 - the absolute value of the difference in position of the values of the vertical component of the block shift information, that correspond to the primary maximum and the secondary maximum of the second frequency distribution, is less than a predefined second difference threshold;
- 20 - the primary maximum of the first frequency distribution is greater than a first frequency threshold;
- the primary maximum of the second frequency distribution is greater than a second frequency threshold.

25 The method according to alternative independent Claim 4 can thus be used to determine image shifts in an image sequence, thus reducing computing effort.

30 A criterion that is suitable for detecting local movements within relevant image zone 6, 7, 8, and which therefore means that the reliability of the zone shift determination is inadequate, was given for both the method according to the main claim and the method according to alternative independent Claim 4.

What is claimed is:

1. A method for determining an image shift (15) in an image sequence, in particular to compensate for a camera movement, a plurality of image zones (6, 7, 8) of images being available for determining the shift (15); each image zone (6, 7, 8) being provided at a specific position in the images; each image zone (6, 7, 8) having predefined dimensions, in particular predefined numbers of pixels in different image directions,

wherein, in order to correct a first image (14) in the image sequence, the shift (15) is determined either from image data of the first image (14) and from image data of a second image (12) that preferably directly precedes the first image (14) in the image sequence or from image data of the first image (14) and from image data of a second input image (11) that preferably directly precedes the first image (14) in the image sequence; a zone shift of an image zone (6, 7, 8) being used as the shift (15) as a function of a reliability for the zone shift determination of the one image zone (6, 7, 8); the zone shift of any given image zone (6, 7, 8) from the multiplicity of image zones (6, 7, 8) being determined either from the image data of the first image (14) and of the second image (12) within a given image zone (6, 7, 8) or from the image data of the first image (14) and of the second input image (11) within a given image zone (6, 7, 8); a method having the following steps being carried out to determine the zone shift in any two image zones (6, 7, 8) and to determine a reliability for the zone shift determination:

- the zone shift and a correlation quotient are formed for each of the two image zones (6, 7);
- a threshold value function is determined as a function of the corresponding value of the determined zone shifts in the two image zones (6, 7);
- the correlation quotient of the one of the two image zones (6, 7) is compared to the value obtained from the threshold value function for the zone shift of the other of the two image zones (6, 7);
- the reliability of the zone shift determination is deemed to

be adequate for one of the two image zones (6, 7) if the correlation quotient determined for the one image zone (6, 7) is greater than the value of the threshold value function to be compared to it.

2. The method according to Claim 1, wherein the correlation quotient for one of the plurality of image zones (6, 7, 8) is determined according to a method having the following steps:

- shift correlation values are determined for multiple possible zone shifts, using a block-matching method;
- the zone shift for which maximum shift correlation values are achieved is deemed to be the zone shift of the image zone (6, 7, 8);
- the correlation quotient is formed from the maximum of the shift correlation values, divided by the average for the determined shift correlation values.

3. The method according to Claim 1, wherein, for any given value of a zone shift that is less than a predefined first threshold value, the threshold value function assumes the value of a predefined second threshold value; and for any given value of a zone shift that is greater than the predefined first threshold value, the threshold value function assumes the value of the predefined second threshold value minus a product, with the product including a predefined gradient parameter and a difference as factors; and the difference being formed from the given zone shift and the predefined first threshold value.

4. A method for determining an image shift in a sequence of images, in particular to compensate for a camera movement, with at least one image zone (6, 7, 8) of images being available to determine the shift (15); the at least one image zone (6, 7, 8) being provided at a predefined position in the images; the at least one image zone (6, 7, 8) having predefined dimensions, in particular predefined numbers of pixels in different directions of the image, wherein, in order to correct a first image (14) in an image

sequence, the shift (15) is determined either from image data of the first image (14) and from image data of a second image (12) that preferably directly precedes the first image (14) in the image sequence or from image data of the first image (14) and from image data of a second input image (11) that preferably directly precedes the first image (14) in the image sequence; with a zone shift of the at least one image zone (6, 7, 8) being used as the shift (15); block shift information, preferably shift vectors, from a block-based coding method being used for the at least one image zone (6, 7, 8) to determine the zone shift; image blocks that are located in at least one image zone (6, 7, 8) being taken into account for the block shift information of the at least one image zone (6, 7, 8); and the at least one image zone (6, 7, 8) being used to determine the shift (15) as a function of a reliability for the zone shift determination.

5. The method according to Claim 4, wherein a method having the following steps is carried out for the at least one image zone (6, 7, 8) to determine the zone shift, which includes a horizontal and a vertical component, and to determine the reliability of the zone shift determination:

- a first frequency distribution of the frequencies of different values for the horizontal component of the block shift information is established to determine the horizontal component of the zone shift, with the horizontal component of the zone shift corresponding to the value of the horizontal component of the block shift information for which the first frequency distribution assumes its primary maximum;
- a second frequency distribution of the frequencies of different values for the vertical component of the block shift information is established to determine the vertical component of the zone shift, with the vertical component of the zone shift corresponding to the value of the vertical component of the block shift information for which the second frequency distribution assumes its primary maximum;
- the reliability of the zone shift determination is deemed to

be adequate when all of the following conditions have been met:

- the absolute value of the difference in position of the values corresponding to the primary maximum and the secondary maximum of the first frequency distribution of the horizontal component of the block shift information is less than a predefined first difference threshold;
- the absolute value of the difference in position of the values corresponding to the primary maximum and the secondary maximum of the second frequency distribution of the vertical component of the block shift information is less than a predefined second difference threshold;
- the primary maximum of the first frequency distribution is greater than a first frequency threshold;
- the primary maximum of the second frequency distribution is greater than a second frequency threshold.

6. The method according to one of the preceding claims, wherein an image movement, preferably produced by a camera movement, is separated from an additional movement that is superimposed on the image movement in some image zones (6, 7, 8) of the image to be corrected, using the following steps:

- the probability that the image movement will occur without the additional movement is determined at different positions of an image;
- the position and dimensions of a given image zone are determined and permanently specified as a function of the probability that the image movement will occur without the additional movement within the given image zone (6, 7, 8);
- at least one first image zone (6, 7, 8) is preferably used to determine the shift (15).

7. The method according to one of the preceding claims, wherein the position and dimensions of the at least one first image zone (6, 7) are selected so that the at least one first image zone (6, 7) of the images to be corrected is largely filled by the image background.

8. The method according to one of Claims 1 through 6,

wherein the position and dimensions of at least one second image zone (8) are selected so that the at least one second image zone (8) of the images to be corrected is largely filled with the image foreground.

9. The method according to Claim 7 or 8, wherein both the at least one first image zone (6, 7) and the at least one second image zone (8) are available for determining a shift (15).

10. The method according to Claims 7 through 9, wherein two first image zones (6, 7) and a single second image zone (8) are available for correcting the image, with the shift (15) being determined in one of the following three ways in descending order of priority:

- from the average of the zone shifts of the first two image zones (6, 7), if the reliability of the zone shift determination of the first two image zones (6, 7) is deemed to be adequate;
- from the zone shift of the one of the two first image zones (6, 7) for which the reliability of the zone shift determination is deemed to be adequate;
- from the zone shift of the second image zone (8).

11. The method according to Claim 10, wherein the method is used for a head-and-shoulder shot, with the first two image zones (6, 7) being selected in a side area to the left and right, preferably symmetrically to the vertical center axis of a predefined rectangular image; the distance of the first two image zones (6, 7) from the bottom of the image being greater than the distance of the first two image zones (6, 7) from the top of the image; the second image zone (8) being selected in the center of the image, preferably symmetrically to the vertical center axis of the rectangular image; the distance of the second image zone (8) from the top of the image being greater than the distance of the second image zone (8) from the bottom of the image.

12. A device for determining a shift (15) using a method

according to one of the preceding claims,
wherein the device includes a shift detecting circuit (100)
and an enlarging circuit (200), with the shift detecting
circuit (100) having a zone shift detector (110), an image
storage device (120), and a microcomputer (130); and the shift
detecting circuit (100) determining the shift (15).

1/2

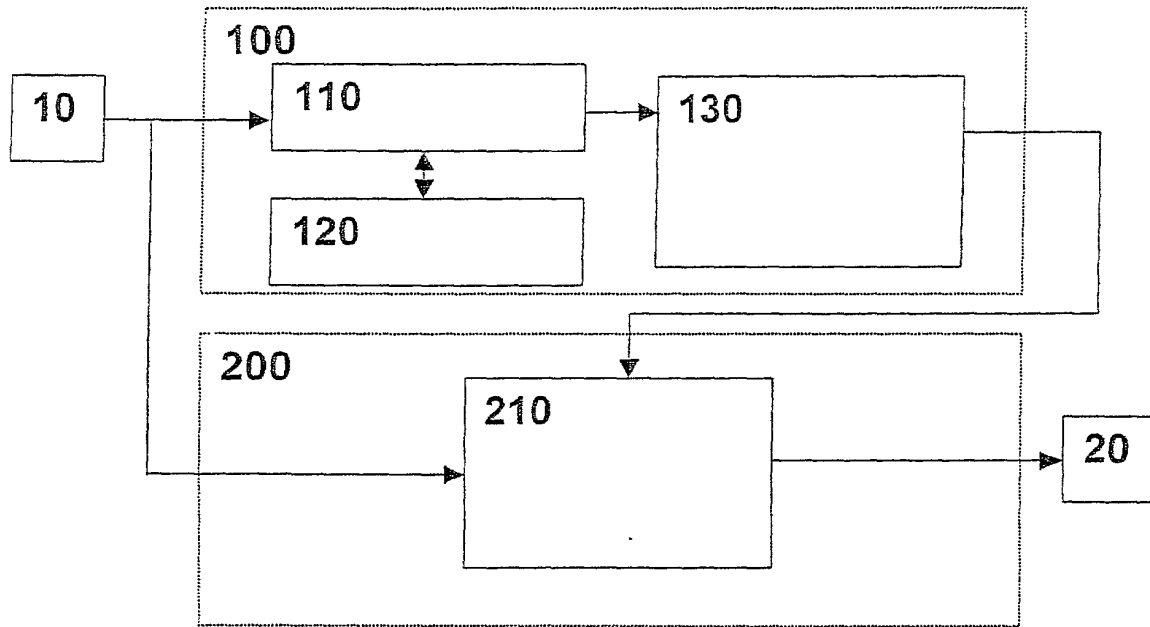


Fig 1

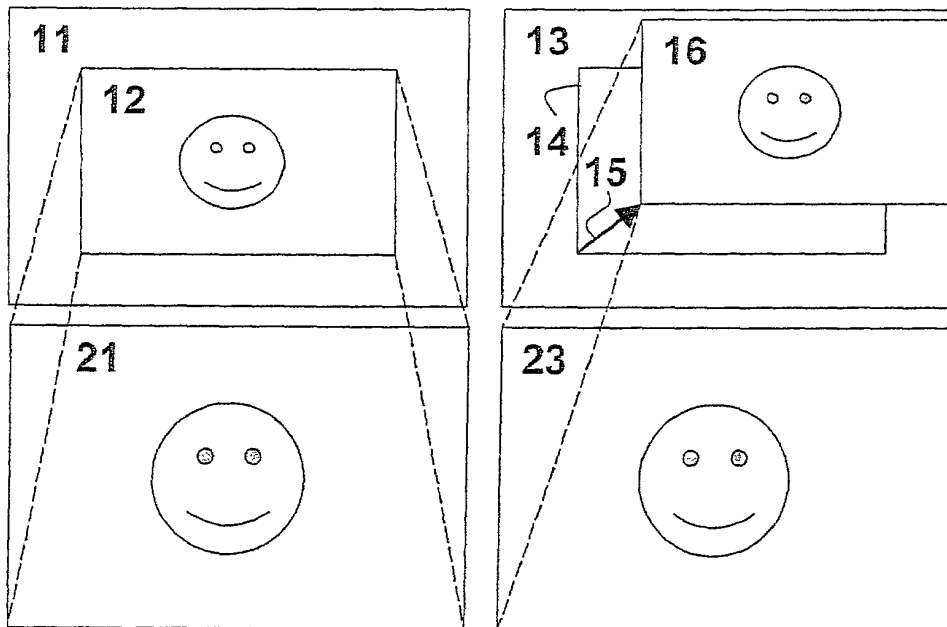


Fig 2

2/2

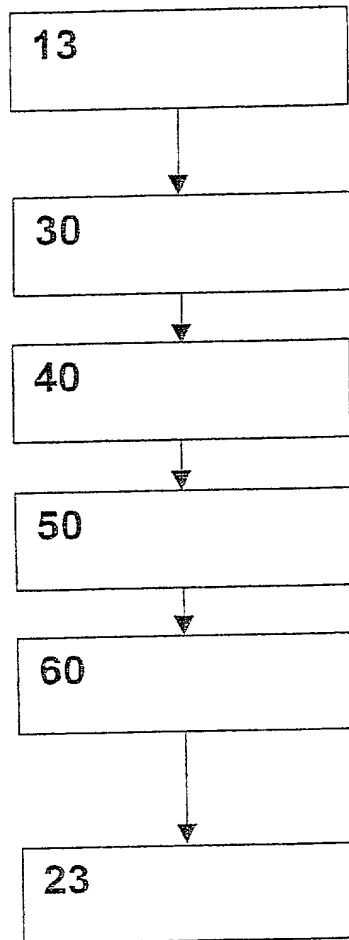


Fig 3

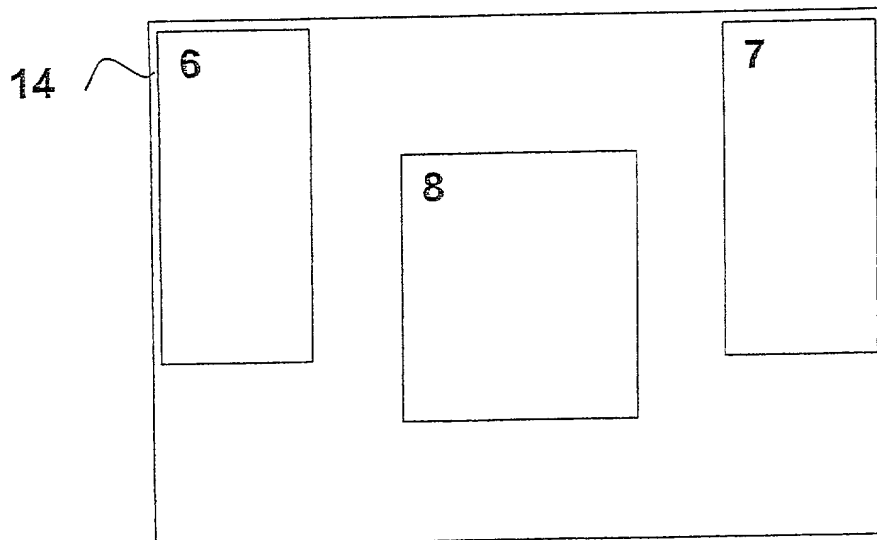


Fig 4

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND DEVICE FOR DETERMINING AN IMAGE SHIFT IN AN IMAGE SEQUENCE**, the specification of which was filed as PCT/DE00/00137 on January 15, 2000.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Express Mail No.: EL24450487245

PRIOR FOREIGN APPLICATION(S)

Number	Country filed	Day/month/year	Priority Claimed Under 35 USC 119
199 09 622.8	Fed. Rep. of Germany	05 March 1999	Yes

② And I hereby appoint Richard L. Mayer (Reg. No. 22,490) and Gerard A. Messina (Reg. No. 35,952) my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Please address all communications regarding this application to:

KENYON & KENYON
One Broadway
New York, New York 10004
CUSTOMER NO. 26646

Please direct all telephone calls to Richard L. Mayer at (212) 425-7200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful and false statements may jeopardize the validity of the application or any patent issued thereon.

1:00
Inventor: **Andreas ENGELSBERG**

Inventor's Signature: Andreas Engelsberg

Date: 18.10.2001

Residence: Steingrube 21
31141 Hildesheim DEX
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.